



Scituate Wayfinding

Phase I: Specifications and Standards

Appendix A: Installation Requirements

Prepared by Favermann Design
06.21.16



FAVERMANN DESIGN

Kit of Parts

COLORS



Pantone Solid Coated
DS 224-1C



Pantone PMS
DS 206-1C



Pantone Black C

FONTS

Fell Double Pica

ABCDEFGHIJKLMNOPQRSTUVWXYZ

abcdefghijklmnopqrstuvwxyz


Helvetica

ABCDEFGHIJKLMNOPQRSTUVWXYZ


abcdefghijklmnopqrstuvwxyz

*Note: This document is for pricing purposes only. Graphical elements are subject to change.

The Town of Scituate Family of Elements

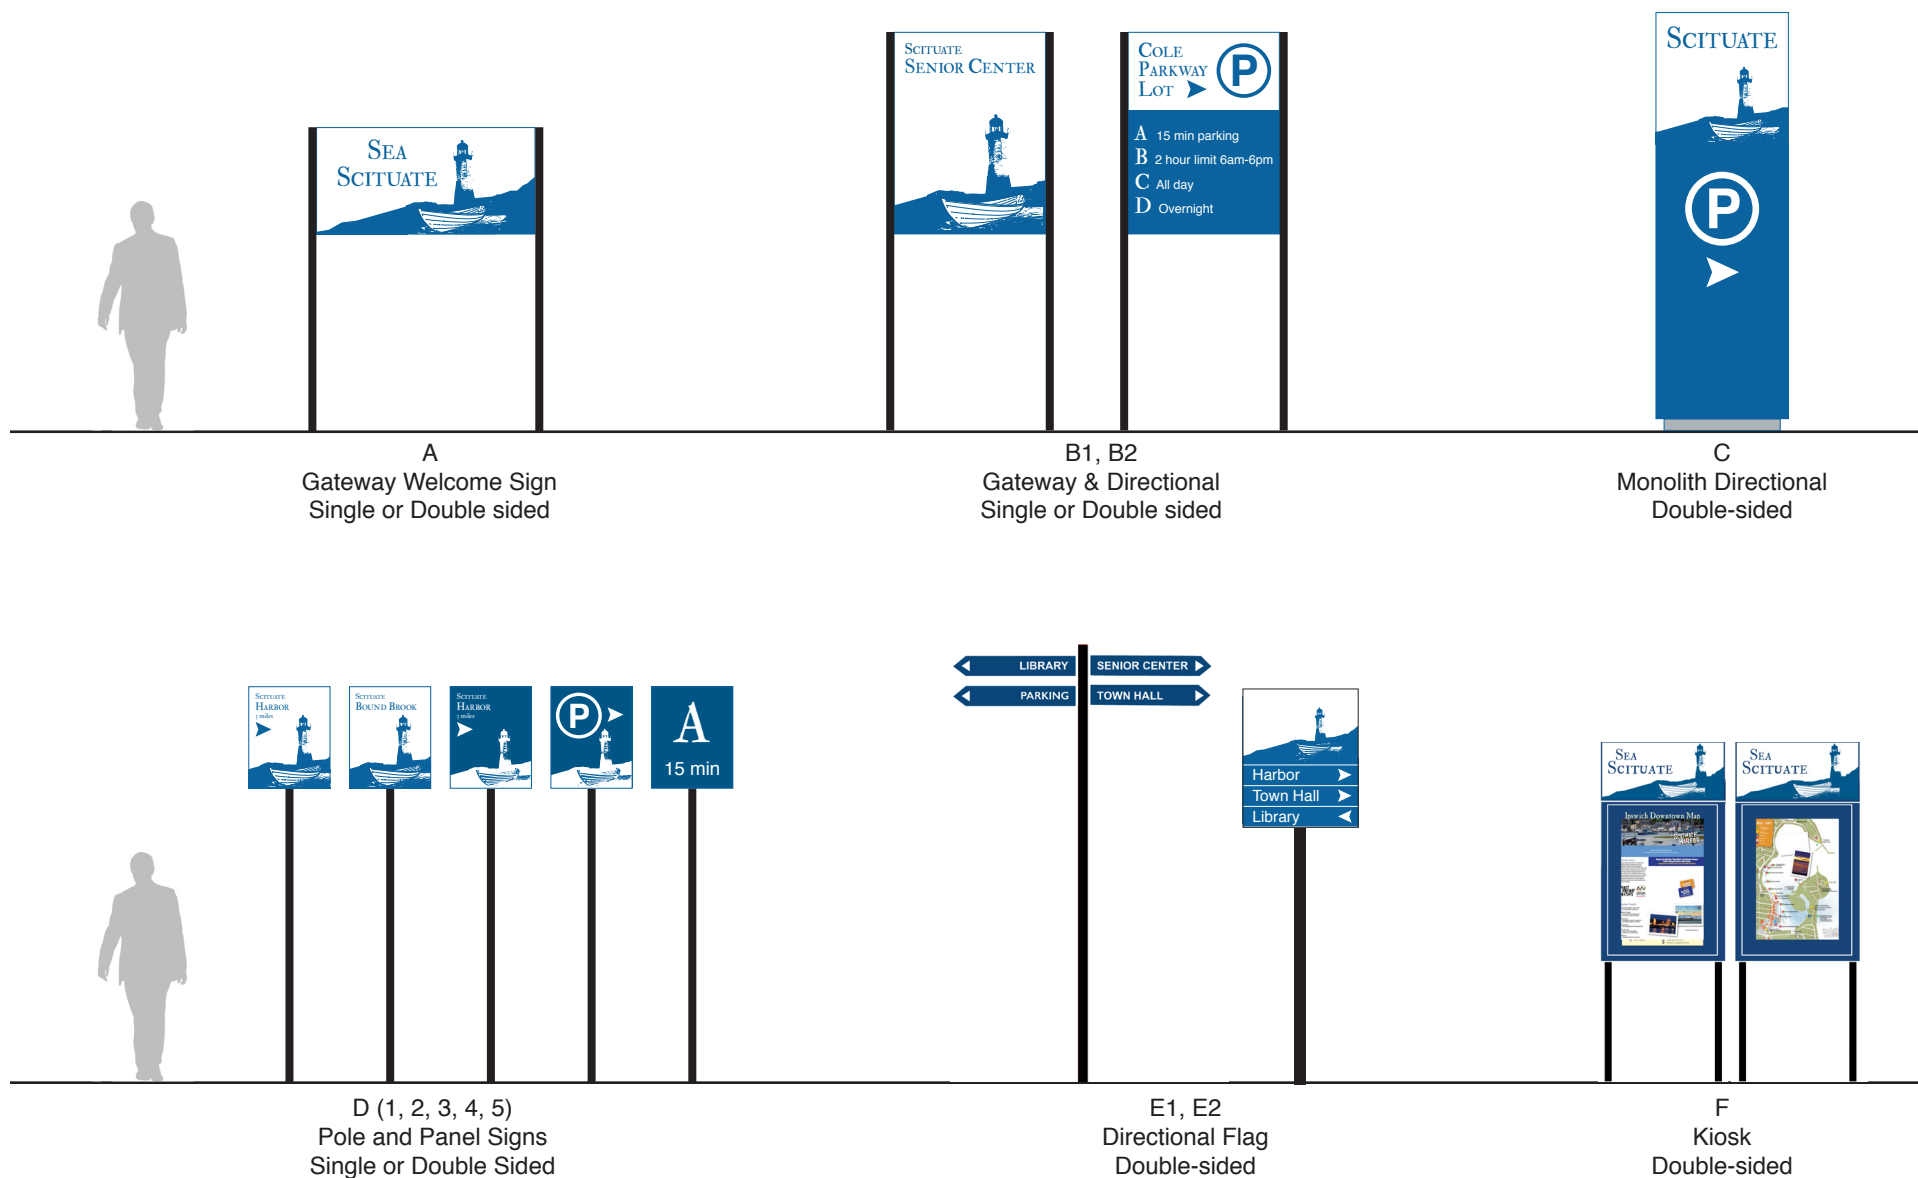

Cole Parkway Lot Family of Elements

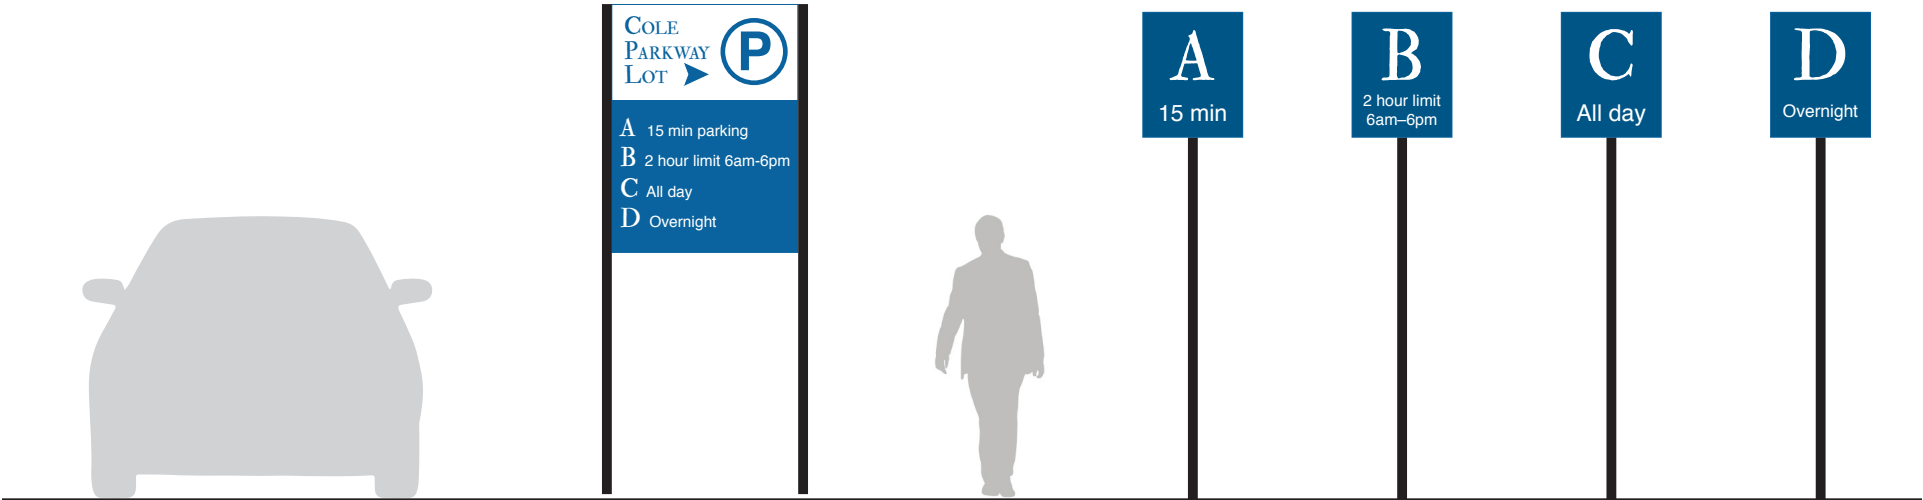

Gateway Welcome Sign: A

POST & PANEL A: Identification

____ Number of Units

____ Number of Sides per Unit

____ Special Conditions

GRAPHICS

Dimensions: 60" x 30"

Material: 0.25" Aluminum panel (or per suggestion of fabricator)

Print: Full color print on adhesive vinyl

Coating: UV and anti-graffiti

Font: Fell Double Pica

STRUCTURE

Posts: 3" square posts metal or pressure-treated wood, capped

Powder coated: Pantone Black C


*Paint applied to all sides; must have 30 year guarantee

Sign fabricator must coordinate with installer for mounting and orientation details

Must verify overall dimensions and orientation in the field

Vendor will make recommendations to affix panel to posts

Footings to be recommended by installer

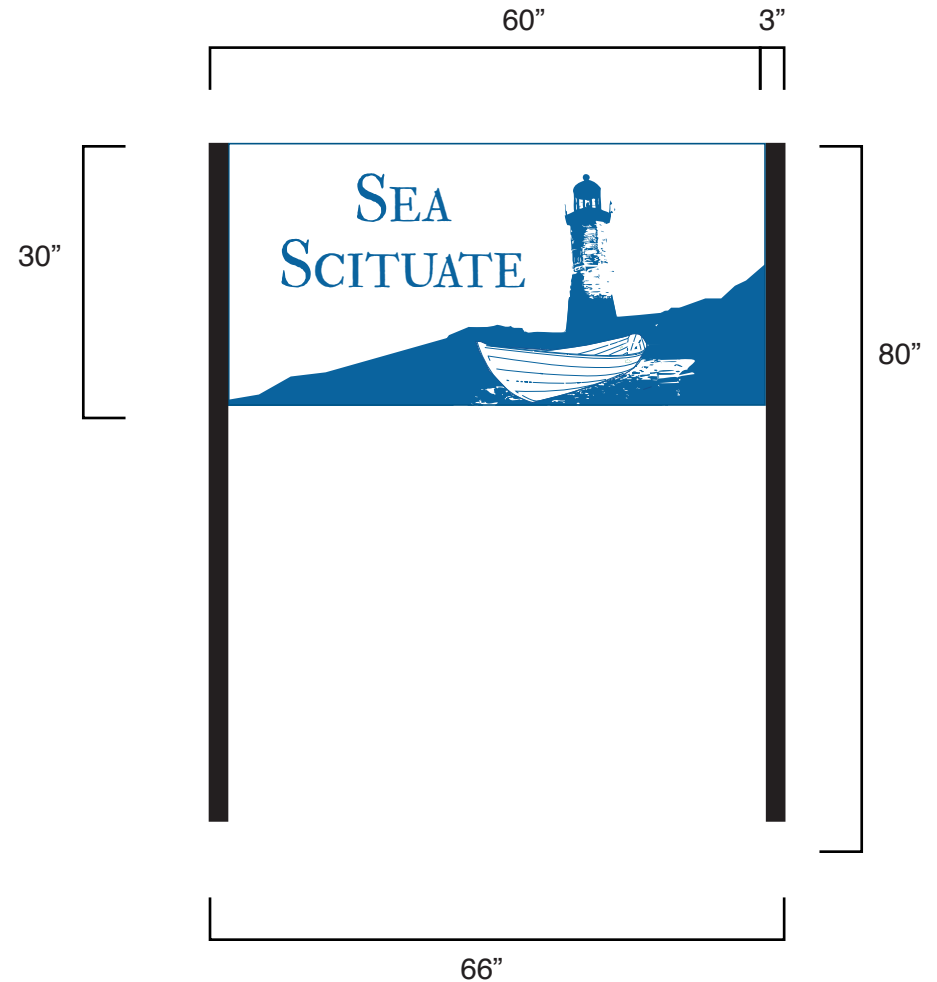

Gateway Sign: B

POST & PANEL B: Identification

____ Number of Units

____ Number of Sides per Unit

____ Special Conditions

GRAPHICS

Dimensions: 30" x 40"

Material: 0.25" Aluminum panel (or per suggestion of fabricator)

Print: Full color print on adhesive vinyl

Coating: UV and anti-graffiti

Font: Fell Double Pica, Helvetica (B2)

STRUCTURE

Posts: 3" square posts metal or pressure-treated wood, capped

Powder coated: Pantone Black C


*Paint applied to all sides; must have 30 year guarantee

Sign fabricator must coordinate with installer for mounting and orientation details

Must verify overall dimensions and orientation in the field

Vendor will make recommendations to affix panel to posts

Footings to be recommended by installer

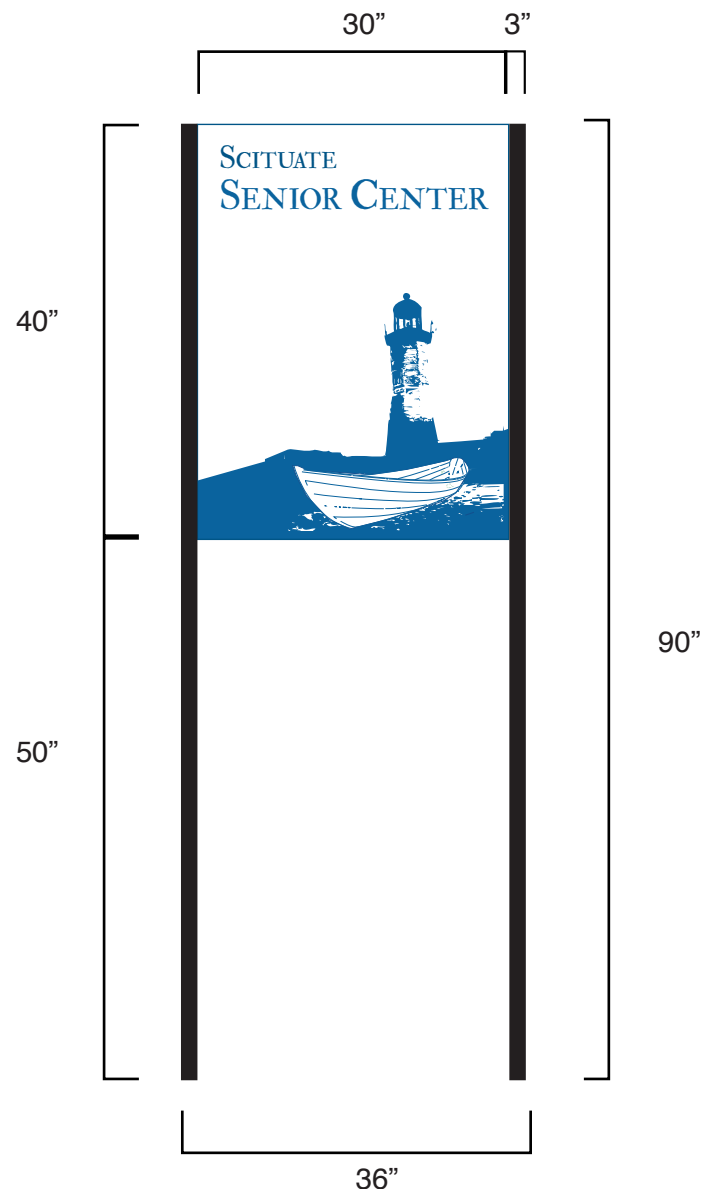

Monolith: C

MONOLITH C: Directional

____ Number of Units

____ Number of Sides per Unit

____ Special Conditions

GRAPHICS

Dimensions: 30" x 92"

Material: 0.25" Aluminum panel (or per suggestion of fabricator)

Print: Full color print on adhesive vinyl

Coating: UV and anti-graffiti

Font: Fell Double Pica, Helvetica

STRUCTURE

Width: minimum 2"; maximum 6"


Paint applied to all sides; must have 30 year guarantee

Sign fabricator must coordinate with installer for mounting and orientation details

Must verify overall dimensions and orientation in the field

Vendor to recommend internal construction

Footing to be recommended by installer

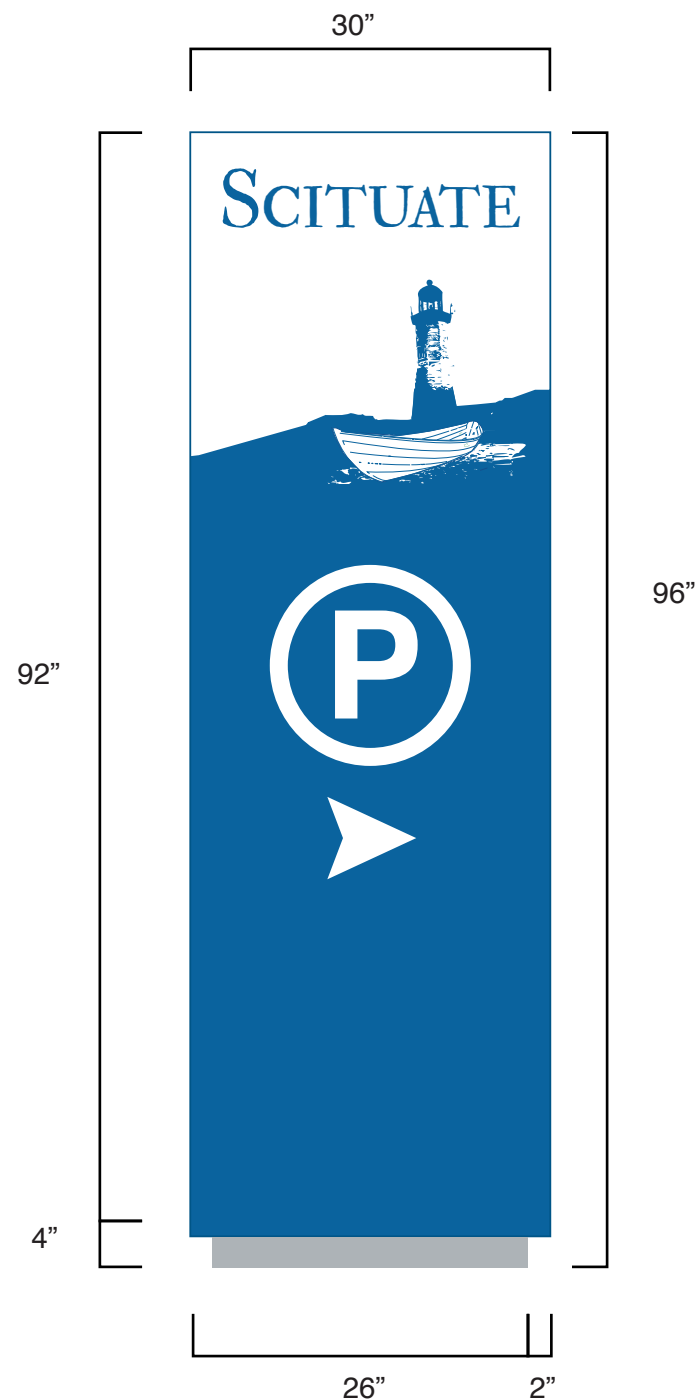

Pole and Panel: D

POLE & PANEL D: Directional

____ Number of Units

____ Number of Sides per Unit

____ Special Conditions

GRAPHICS

Dimensions: 24" x 36"

Material: 0.25" Aluminum panel (or per suggestion of fabricator)

Print: Full color print on adhesive vinyl

Coating: UV and anti-graffiti

Font: Helvetica

STRUCTURE

Posts: 3" square posts metal or pressure-treated wood, capped

Powder coated: Pantone Black C


*Paint applied to all sides; must have 30 year guarantee

Sign fabricator must coordinate with installer for mounting and orientation details

Must verify overall dimensions and orientation in the field

Vendor will make recommendations to affix panel to posts

Footing to be recommended by installer

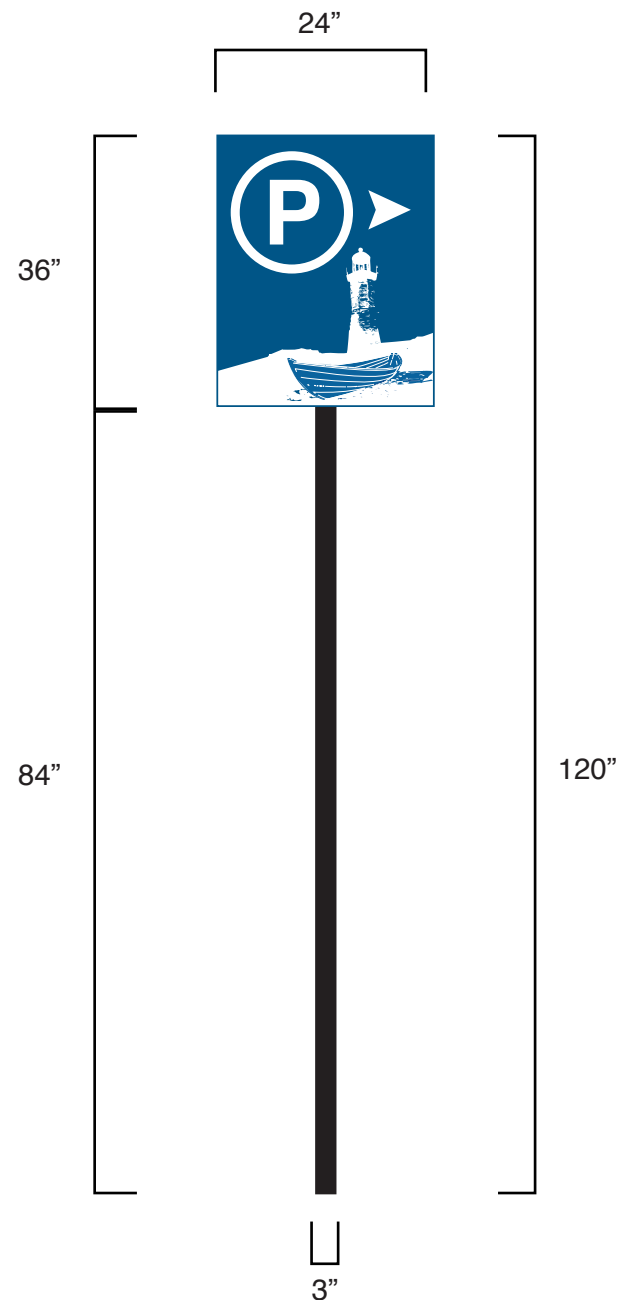

Pole and Directional Arrow: E1

POLE & ARROW E: Directional

____ Number of Units

____ Number of Sides per Unit

____ Special Conditions

GRAPHICS

Dimensions: 30" x 5"

Material: 0.25" Aluminum panel (or per suggestion of fabricator)

Print: Full color print on adhesive vinyl

Coating: UV and anti-graffiti

Font: Helvetica

STRUCTURE

Posts: 3" square posts metal or pressure-treated wood, capped

Powder coated: Pantone Black C


*Paint applied to all sides; must have 30 year guarantee

Sign fabricator must coordinate with installer for mounting and orientation details

Must verify overall dimensions and orientation in the field

Vendor will make recommendations to affix panel to posts

Footings to be recommended by installer

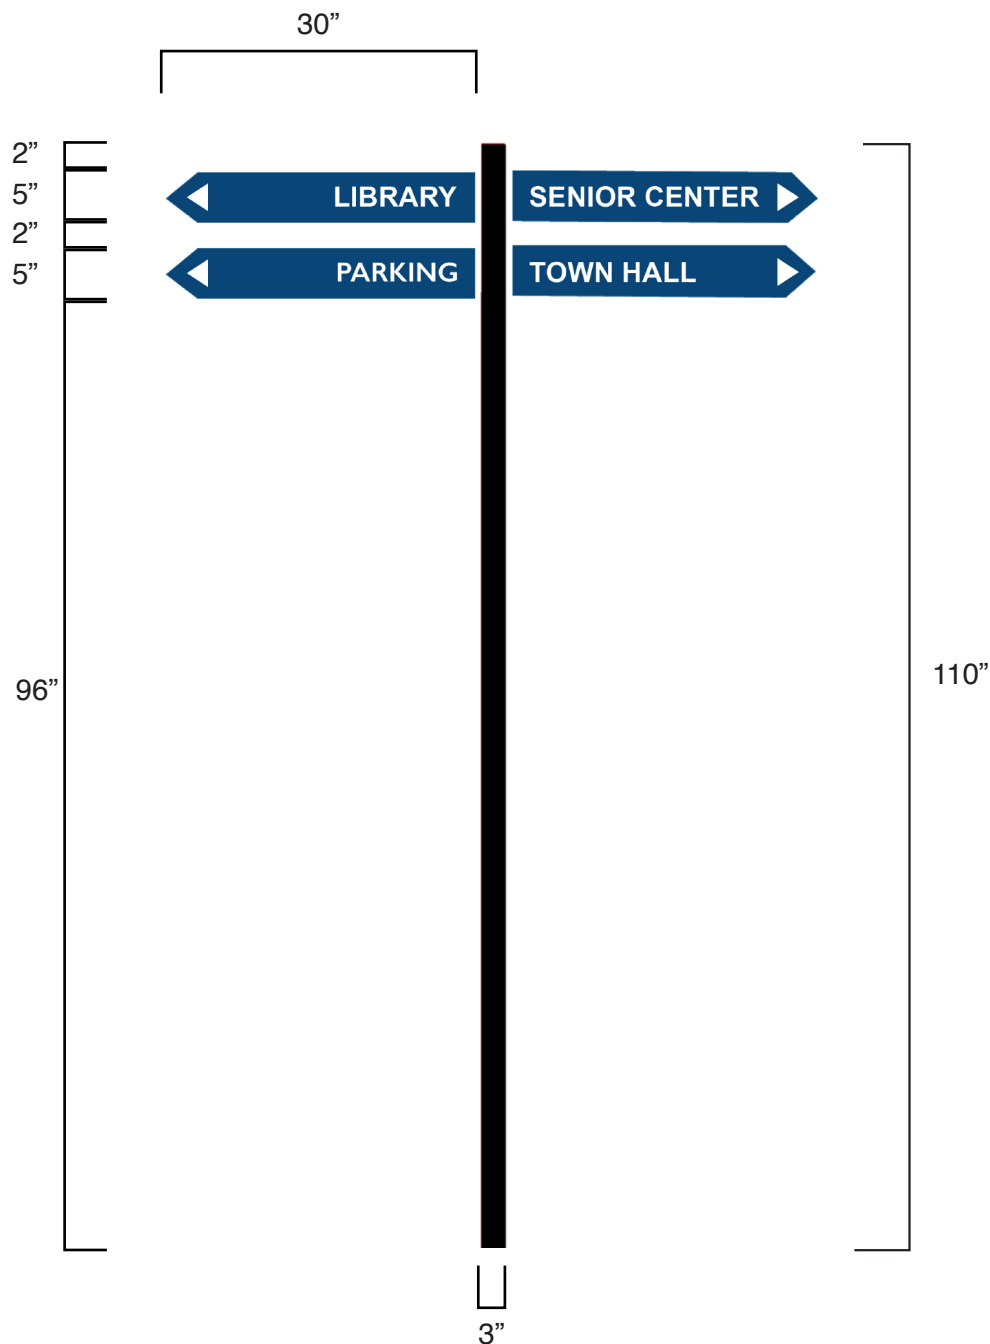

Pole and Directional Arrow: E2

POLE & ARROW E: Directional

____ Number of Units

____ Number of Sides per Unit

____ Special Conditions

GRAPHICS

Dimensions: 30" x 36"

Material: 0.25" Aluminum panel (or per suggestion of fabricator)

Print: Full color print on adhesive vinyl

Coating: UV and anti-graffiti

Font: Helvetica

STRUCTURE

Posts: 3" square posts metal or pressure-treated wood, capped

Powder coated: Pantone Black C


*Paint applied to all sides; must have 30 year guarantee

Sign fabricator must coordinate with installer for mounting and orientation details

Must verify overall dimensions and orientation in the field

Vendor will make recommendations to affix panel to posts

Footings to be recommended by installer

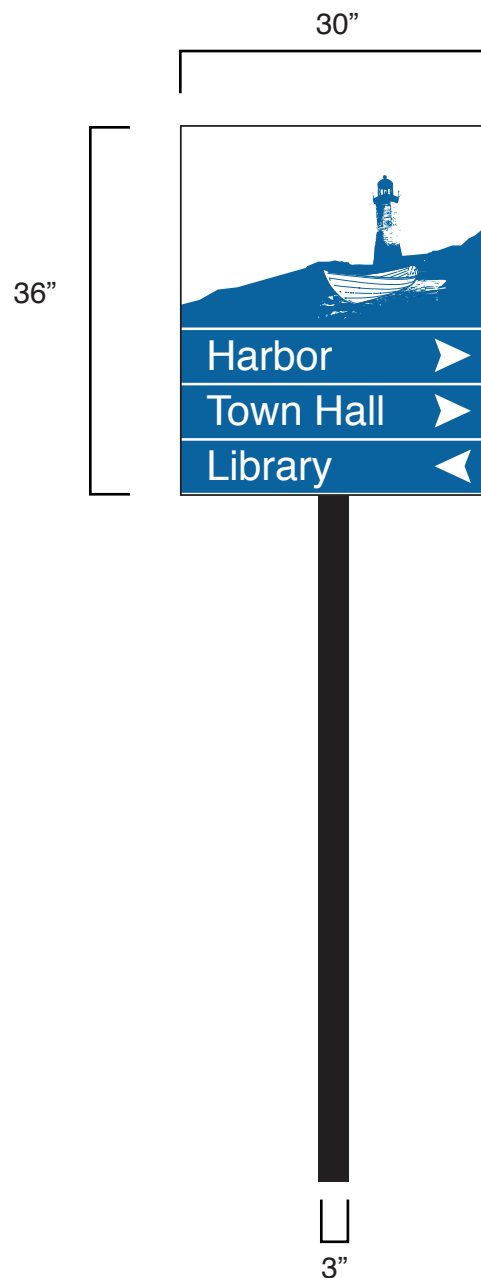

Kiosk: F

KIOSK F: Informational

____ Number of Units

____ Number of Sides per Unit

____ Special Conditions

GRAPHICS

Dimensions: Graphics 36" x 16"

Material: 0.25" Aluminum panel (or per suggestion of fabricator)

Print: Full color print on adhesive vinyl

Coating: UV and anti-graffiti

Font: Fell Double Pica

STRUCTURE

Posts: 3" square posts metal or pressure-treated wood, capped

Powder coated posts: Pantone Black C

Powder coated frame and door: Pantone Solid Coated 647C

Glass panel door on piano hinge with lock affixed

*Paint applied to all sides; must have 30 year guarantee

Sign fabricator must coordinate with installer for mounting and orientation details

Must verify overall dimensions according to standard door sizes and verify orientation in the field

Vendor may make recommendations for fabrication of waterproof kiosk, windows and doors

Vendor needs to price out top panel and door areas as internally illuminated

Footings to be recommended by installer

